


LCR and Capacitance Meter



Technical Data

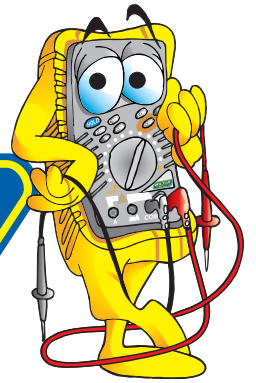

MT957

The new MT957 LCR meter is battery operated and provides direct and accurate measurements of inductors, capacitors and resistors with different frequencies and is selectable for auto ranging of manual ranging. Convenient front panel pushbuttons and controls include functions such as data hold, maximum and minimum record mode and relative mode. The 11,000 count LCD display is backlit for easy reading in dark locations.

Features Include:

- 11 000 Count Display
- MIN/MAX Record mode
- Relative mode
- Measures Inductance to 20H
- Measures Resistance to 110MΩ
- Measures Capacitance to 110mF
- Zero adjustment for low capacitance range
- Easy-to-read 11,000 Count LCD Display with annunciators
- Double injection rubber housing with IP67 waterproof O-Ring sealed case
- Data hold function
- Auto Power Off
- Low Battery Indication

General Specifications

Instrument complies with	: EN61010-1
Insulation	: Class2, Double insulation.
Oversvoltage category	: CATIII 600V
Display	: 11000 counts LCD display with function indication
Polarity	: Automatic, (-) negative polarity indication
Overrange	: "OL" mark indication
Low battery indication	: The "□" is displayed when the battery voltage drops below the operating level .
Measurement rate	: 4 times per second nominal.
Auto power off	: Meter automatically shuts down after approx. 15 minutes of inactivity.
Operating environment	: 0°C to 50 °C (32 °F to 122 °F) at < 70 % relative humidity.
Storage temperature	: -20°C to 60°C (-4 °F to 140 °F) at < 80 % relative humidity.
For inside use, max height	: 2000m
Pollution degree	: 2
Power	: One 9V battery, NEDA 1604, IEC 6F22.
Dimensions	: 150 (H) X 70 (W) X 48 (D) mm
Weight	: 225g.



Accuracy is given at 18°C to 28°C (65°F to 83°F), less than 70% RH

Measurement	Range	Resolution	Accuracy
Resistance	110.0Ω	0.01Ω	± 1.2% of rdg ± 0.5Ω
	1.1000kΩ	0.1Ω	± 1.2% of rdg ± 10 dgts
	11.00kΩ	1Ω	
	1100.0kΩ	10Ω	
	1.1000MΩ	100Ω	± 2.5% of rdg ± 10 dgts
	11.000MΩ	1kΩ	
	40.00MΩ	10kΩ	
Capacitance (Auto-ranging)	11.00nF	1pF	± 5.0% of rdg ± 0.7nF
	110.00nF	10pF	± 5.0% of rdg ± 15 dgts
	1.1000uF	100pF	
	11.000uF	1nF	± 3.0% of rdg ± 10 dgts
	110.00uF	10nF	
	1.1000mF	0.1uF	± 10.0% of rdg ± 10 dgts
	11.000mF	1uF	
	110.00mF	10uF	
Inductance (Manual-ranging)	11.000mH	1uH	± 2.0% of rdg ± 0.05mH
	110.00mH	10uH	
	11.00H	1mH	± 5.0% of rdg ± 0.05H
	20.00H	10mH	± 5.0% of rdg ± 0.2H
Measurement	Test current	Resolution	Accuracy
Diode Test	0.3mA typical	1 mV	± 10% of rdg ± 5 dgts

Ordering Information

HEAD OFFICE

Cnr Rover and Jaguar Roads, Rustivia Ext 3, Elandsfontein
P.O. Box 888, Isando 1600, South Africa
Telephone: +27 11 822 1551
Sales Fax: +27 11 822 2806
Admin Fax: +27 11 822 1411
e-mail: sales@major-tech.com
National Tel: 08 61 MAJORT / 08 61 62 5678

BRANCHES - CAPE TOWN

109 Kyalami Drive, Killarney Gardens
P.O. Box 60122, Tableview 7439
Telephone: +27 21 556 3091
Sales Fax: +27 21 556 3093

BRANCHES - DURBAN

6A Pastel Park, Wareing Road, Pinetown
P.O. Box 15550, Ashwood 3605
Telephone: +27 31 701 5830
Sales Fax: +27 31 701 6986

BRANCHES - PORT ELIZABETH

175 Kempston Road, Sidwell
P.O. Box 22499, Port Elizabeth 6000
Telephone: +27 41 453 3818
Sales Fax: +27 86 633 9809

