

LFW Floodlights



Technical Datasheet



LFW-10NWC & LFW-20NWC

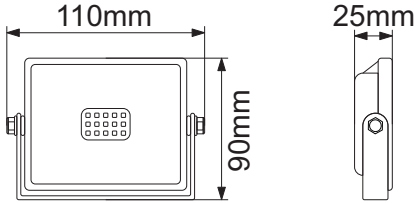
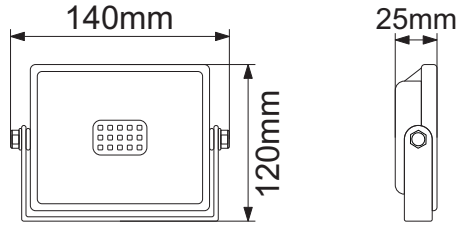
The compact LFW range of floodlights offer a natural light for improved visibility. These 10W & 20W IP65 LED based floodlight are capable of producing high lumen output and are designed as a replacement for traditional floodlights. The glass cover is 4mm strengthened clear glass which is fully waterproof and resistant to all environmental factors. The lighting source is made up of high power SMD LED's, which in turn are directly connected to the aluminium shell ensuring very low heat emissions and a longer lifespan.

Features:

- SMD LED
- Resistant to rust
- Slim aluminium casing
- Can be mounted vertically or horizontally

Applications

- Business
- Commercial
- Domestic

DESCRIPTION	LFW-10NWC	LFW-20NWC
LED Power	10W	20W
LED Type	SMD LED	SMD LED
Lumen Output	800Lm	1600Lm
Colour Temperature	4000K	4000K
Rated Life Hours	25 000 hours	25 000 hours
Power Supply	AC220 - 240V	AC220 - 240V
Frequency	50 - 60Hz	50 - 60Hz
Power Factor	>0.9	>0.9
CRI	>80	>80
Beam Angle	110°	110°
IP Grade	IP65	IP65
Weight	0.25Kg	0.34Kg
Dimensions Width X Height X Depth (mm)	110 x 90 x 25mm 	140 x 120 x 25mm 

Contact Us

Branches: Johannesburg | Cape Town | Durban | Port Elizabeth | Bloemfontein
011 872 5500 | 021 556 3091 | 031 569 1024 | 041 452 1172 | 051 430 4958
email: sales@major-tech.com www.major-tech.com

