


# Phase Rotation Meter

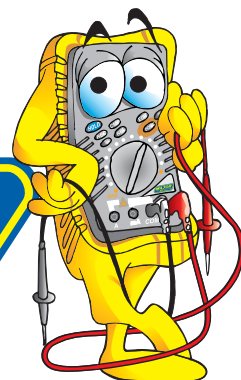

## Technical Data

### K8031F

The K8031F has a rotary disc indication and is designed to check phase sequence on 3-phase systems, with a wide range from 110V to 600V AC. Neon lamps provided on the unit confirms whether a phase is open or to ensure the correct connection. The K8031F is small, lightweight and portable, designed for maximum ease of operation and ruggedness throughout. The large alligator clips are ideal for holding onto terminals of switchboards.

#### Features Include:

- Rotary disc indication
- Fused test leads included
- 3-Phase neon indication
- Checks phase sequence and open phase simultaneously
- Sealed against dust, the unit ensures reliable performance
- Small lightweight and portable
- Can check a wide range of 3-phase power source from 110V to 600V AC
- Large size fused crocodile clips

#### General Specifications

Voltage	: 110V ~ 600V
Time Limit for Continuous Use	: Within 5 minutes in case voltage is above 500V
Frequency	: 50/60Hz
Withstand Voltage	: 4000V AC for one minute
Dimensions	: 106(L) X 75(W) X 40(D) mm
Weight	: Approx. 350g
Cord	: 1.5m each of red (R), white (S) and blue (T) cord
Fuse	: 0.5A/250V (Model 8031F only)
Accessories	: Instruction manual/Carrying case



## Ordering Information

#### HEAD OFFICE

Cnr Rover and Jaguar Roads, Rustivia Ext 3, Elandsfontein  
P.O. Box 888, Isando 1600, South Africa  
Telephone: +27 11 822 1551  
Sales Fax: +27 11 822 2806  
Admin Fax: +27 11 822 1411  
e-mail: sales@major-tech.com  
National Tel: 08 61 MAJORT / 08 61 62 5678

#### BRANCHES - DURBAN

6A Pastel Park, Wareing Road, Pinetown  
P.O. Box 15550, Ashwood 3605  
Telephone: +27 31 701 5830  
Sales Fax: +27 31 701 6986

#### BRANCHES - CAPE TOWN

109 Kyalami Drive, Killarney Gardens  
P.O. Box 60122, Tabelview 7439  
Telephone: +27 21 556 3091  
Sales Fax: +27 21 556 3093

#### BRANCHES - PORT ELIZABETH

175 Kempston Road, Sidwell  
P.O. Box 22499, Port Elizabeth 6000  
Telephone: +27 41 453 3818  
Sales Fax: +27 86 633 9809

