




## MT940 Light Meter

The MT940 is a handheld light meter that provides accurate display of light levels in terms of Foot Candle (FC) or LUX over a wide range. This versatile meter offers Peak Hold and Data Hold functions and can measure light up to 20,000 Lux or FC with an accuracy of 0.01Lux/FC. The light sensor is connected through an extension cable to the meter, providing fast measurements in multiple environments. The readings are displayed on a large and clear LCD display with range annunciations to assist the user. This is an essential tool for Designers or Quality Assurance Managers to troubleshoot or check lighting levels in a variety of situations from office to factory areas where health and safety is a requirement.

### Features

- Check light levels in a wide variety of situations
- Accurate test with fast response and auto zero adjustment
- 4 measuring ranges for Lux and Foot Candle
- Lux range from 200 Lux to 200,000 Lux
- Foot Candle range from 20fc to 20,000fc
- Measurement rate 2 times per second
- Peak Hold and Data Hold functions
- Symbol and unit display - easy to read
- Overrange indication
- Auto Power Off

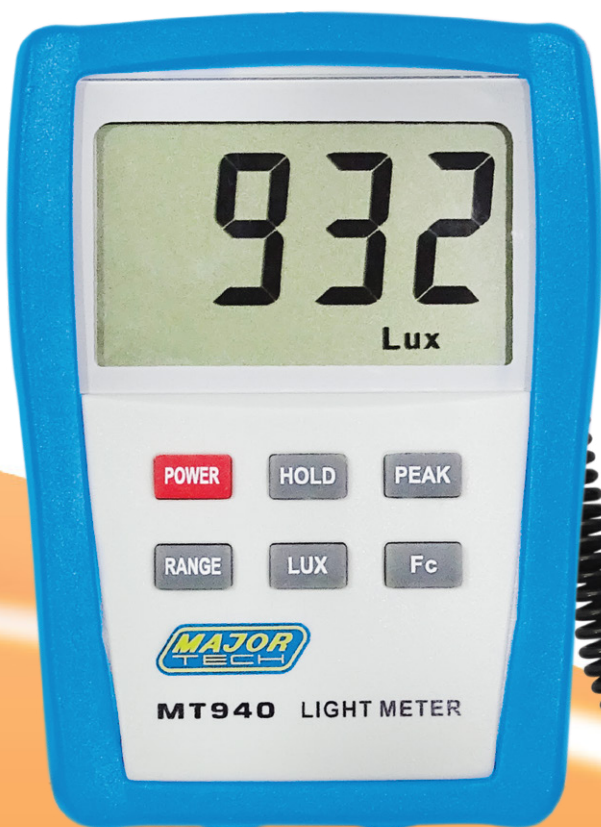

Function	Range	Accuracy
Lux Range	200.0 to 200,000 Lux	$\pm(5.0\% +10)$
Foot Candle Range	20.00 to 20,000 fc	$\pm(5.0\% +10)$
Spectral Response	CIE Photopic (human eye response curve)	
Photo Detector	Photo diode and filter	
Sample Rate	2 times/sec	
Size	<b>Meter</b> 130 x 95 x 30mm	
	<b>Sensor</b> 100 x 60 x 27mm	
Weight	300g	



3½ Digits Large Display



Sensor with 1,2M Extension

**MT940** | **Digital Light Meter**

**Contact Us**  
**South Africa**

🌐 [www.major-tech.com](http://www.major-tech.com) ✉ [sales@major-tech.com](mailto:sales@major-tech.com)

**Australia**

🌐 [www.majortech.com.au](http://www.majortech.com.au) ✉ [info@majortech.com.au](mailto:info@majortech.com.au)