



VETi[®] PIR Motion Sensor

The PIR36 automatically turns on lights or any electrical device within the sensors rated load, when motion and body heat are detected. It has a 360° detection area and adjustable settings, easily integrated into new or existing installations. With an IP20 rating, the sensor is intended for indoor installations. Installation must be done by a qualified electrician.

Features


- <3 – 2000 LUX (Adjustable)
- 360° Detection Area
- 8m Detection Distance
- Automatically turns on lights when motion and body heat is detected
- Time-delay and ambient light adjustment
- Identify day and night automatically
- Rated Load
 - 2000W (Incandescent Lamps)
 - 1000W (LED / CFL)
- IP20 Rating - Indoor Installations




Function	Range
Detection Area	360°
Detection Distance	8m Max. <24°C
Detection Motion	0.6 to 1.5m/s
Speed Ambient Light	<3 to 2000 Lux (Adjustable)
Installation Height	2.2m to 4m
Voltage	220 to 240V AC 50/60Hz
Power Frequency	2000W (Incandescent)
Rated Load	1000W (LED / CFL) 10 sec to 15 min
Time Delay IP Rating	IP20 (Indoor Installation)
Standards	IEC 60669-1 / IEC 60669-2-1 AS/NZS 60669.1 / AS 60669.2.1



Sensor Information

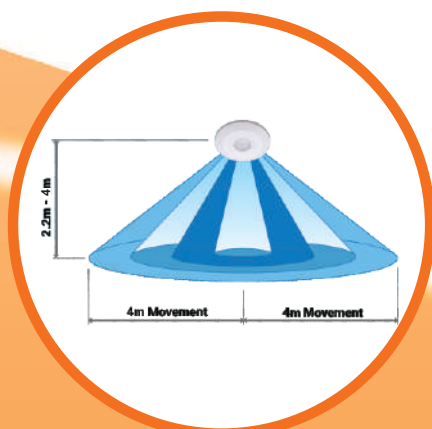

Ceiling Installation

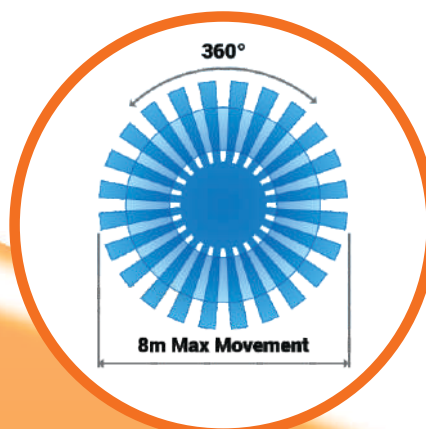

360° Detection Range

PIR36 | **360° PIR Motion Sensor**

Contact Us
South Africa

🌐 www.major-tech.com ✉ sales@major-tech.com

Australia

🌐 www.major-tech.com.au ✉ info@major-tech.com.au